




QIBAI PLASTICS

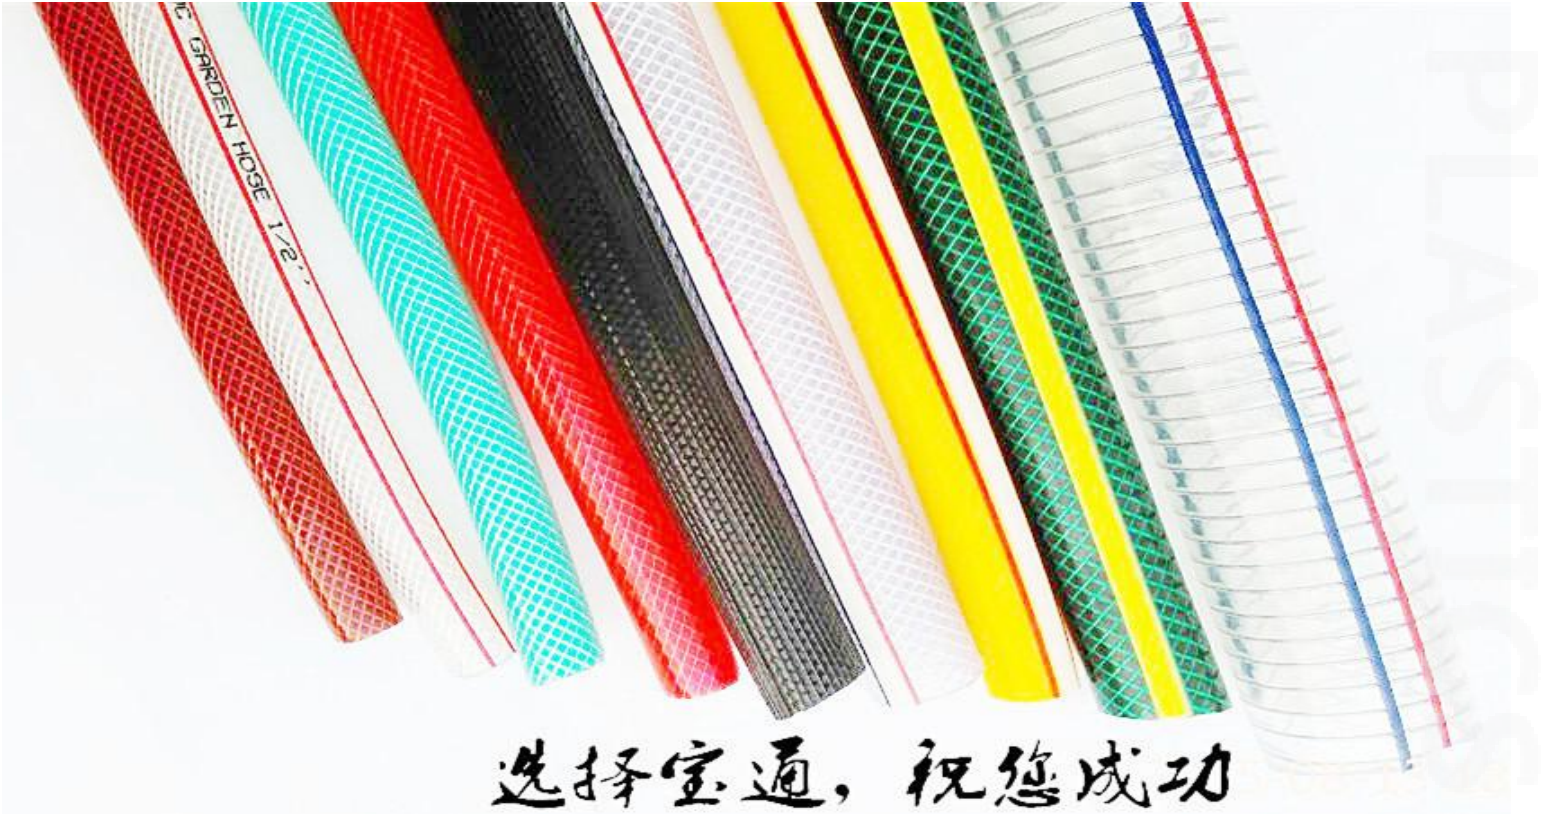

选择宝通，祝您成功

CHANGLE QIBAI TRADING CO.,LTD 潍坊宝通塑料制品有限公司

www.pvchose.net email: sales@pvchose.net pvchose@qq.com

Factory Address: No.1 Chengnan Industrial Zone,Changle,Weifang,Shandong,China,262400

Tel: 086 536 6269356 whats app/wechat: 15318994661



Catalogue Pages

page 1	-----	catalogue cover
page 2	-----	catalogue pages
page 3	-----	company profile
page 4	-----	company contact
page 5	-----	presentation structure
page 6	-----	workshops 1
page 7	-----	workshops 2
page 8	-----	FAQ
page 9	-----	products--pvc steel wire hose
page 10	-----	products--pvc steel wire hose/data
page 11	-----	products--pvc steel wire hose/data
page 12	-----	products--pvc braided hose hose
page 13	-----	products--pvc braided hose hose/data
page 14	-----	products--pvc garden hose
page 15	-----	products--pvc garden hose/data
page 16	-----	products--pvc layfat water hose
page 17	-----	products--pvc layfat water hose/data
page 18	-----	products--pvc oil gas hose
page 19	-----	products--pvc oil gas hose/data
page 20	-----	products--pvc clear liquid hose
page 21	-----	products--pvc clear liquid hose/data
page 22	-----	products--pvc high pressure spray hose
page 23	-----	products--pvc high pressure spray hose/data
page 24	-----	products--pvc twin welding hose
page 25	-----	products--pvc twin welding hose/data
page 26	-----	products--pvc braided and steel wire hose
page 27	-----	products--pvc braided and steel wire hose/data
page 28	-----	products--pvc helix suction hose
page 29	-----	products--pvc helix suction hose/data
page 30	-----	products--pvc helix suction hose



Our company

潍坊宝通塑料制品有限公司

Welcome to QINBAI PLASTICS FACTORY, your reliable pvc hose factory partner in China!

We specialize in PVC hoses manufacture and export in China. We have been in the pvc hoses line for over 20 years. We have our own brand and excellent design & technique & QC team.

Our main products are pvc braided hoses, pvc steel wire hoses, pvc spiral steel wire reinforced hoses, pvc fiber reinforced hoses, pvc quality high-pressure layflat hoses, pvc fiber reinforced garden hoses, pvc fiber reinforced fire hose, pvc fiber reinforced shower hose, pvc transparent tube, pvc clear hose, pvc specialized air hose, pvc suction hose, pvc spray hose, pvc garden hose, pvc liquid hose, pvc gas hose, pvc oil hose.

We mainly export to Europe, America, Southeast Asia, Mid-East, Latin America and so on. Welcome customers' designs. All quality, prices, and service are emphasized and competitive.

If you are interested in cooperating with us, you can place your sample orders first or send your samples/designs to us, we'd develop and make counter samples for you. Or, you can place your formal orders to us directly. OEM orders are accepted. Minimum orders are negotiable.

Our workshop&capacity

Till now, we have 5 workshops with 40 pcs production lines, our factory is about 15000 centiare. Our production capacity per year arrives to 20000 tons. This capacity makes us have more kinds of pvc hose, with more sizes, with more order's production ability and quicker delivery goods. For keeping our quality and market competitive ability, we have built ourself R&D department, we have ourself technician of 50 people. We also have ourself QC and QC institute.

Meet the Team

Mr Zhong is our general production manager who is in charge of our production producing. He is professional in pvc hose line.

Ms Qin is our sales general manager in domestic market who is in charge of our sales working and she is professional in production and sales.

Ms Vera is our sales manager in export market who is in charge of export orders and she is professional in export and sales.

CHANGLE QIBAI TRADING CO.,LTD 潍坊宝通塑料制品有限公司

www.pvchose.net sales@pvchose.net pvchose@qq.com



CONTACT US

EXPORT DEP.:

Tel:86-536-6269 356

Email: sales@pvchose.net

Email: pvchose@qq.com

Email: pvchoses@gmail.com

ATTN: Ms Vera Tin



whats app: 15318994661




wechat: 15318994661

Factory Address: No.1 Chengnan Industrial Zone,Changle,Weifang,Shandong,China,262400



Presentation structure

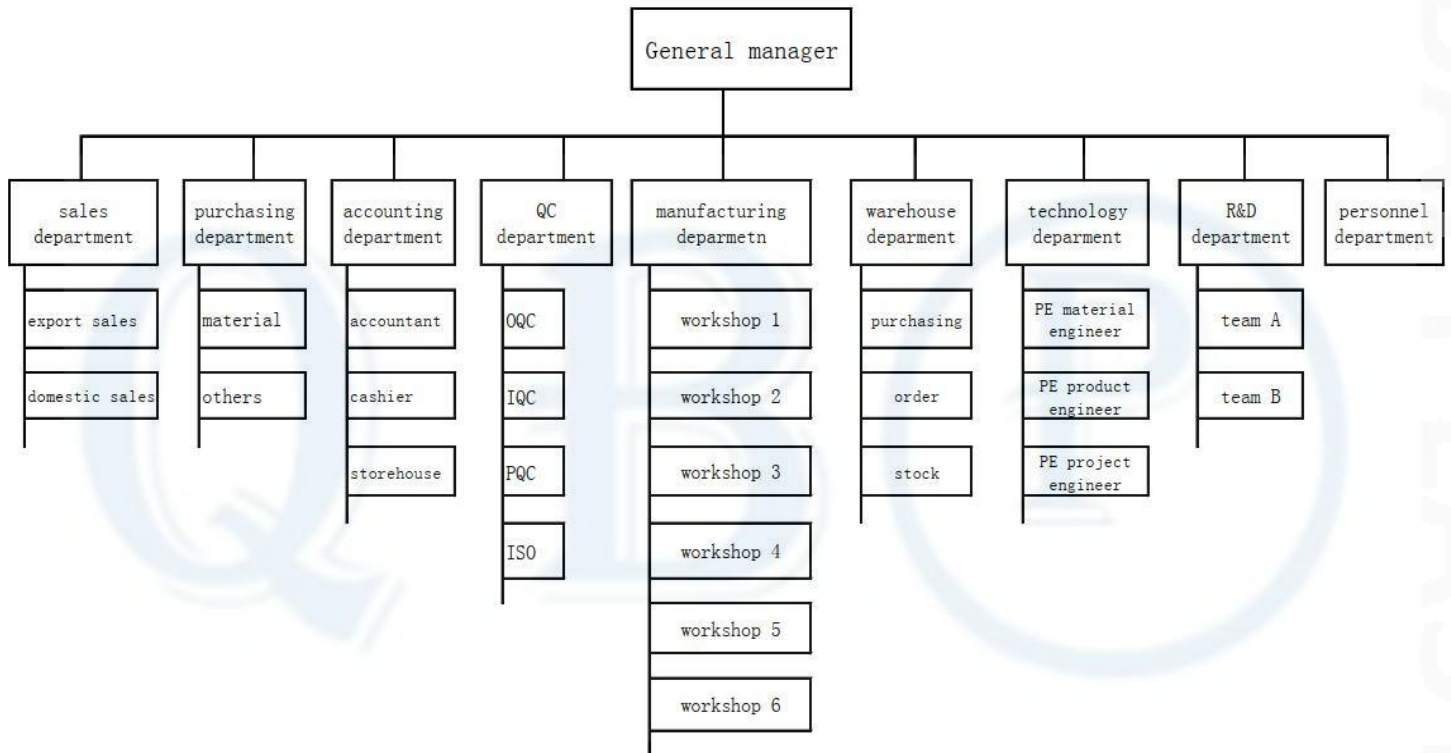

company: QIBAI PLATSTICS FACTORY
website: www.pvchose.net

WORKSHOP

GATE



WORKSHOP





1. Samples and samples charge

A.Samples Charge

For the new customer, samples will be made and sent after receipt of the sample charge. Usually the courier charge should be collected, or we can pay the courier charge in advance if you have already included it in the samples charge. For some styles, we might not have the same material when you ask for samples. So similar material or styles might be made for you. Small quantity sample can be free to customers.

B.Samples leadtime

it takes about 2-7 days.

2. Trade term

FOB or C&F or CIF acceptable.

3. Payment term

Only T/T (wire transfer in advance) or L/C (only for large quantity order) acceptable.

4. Minimum quantity

Most of the styles, we need minimum quantity, which is different according to different styles.

5. Delivery time

We need 10-30 days (according to the quantity and item style) to deliver the goods after receipt of the T/T payment.

6. Quality and inspection

We make all goods according to customers' requirements & the confirmation samples. We have the perfect quality controllers, which have professional knowledge of bags and have been in this line for years. We control the quality from the raw material to finished production. You are also welcomed to come to inspect your goods at any time.


7. Shipment and customs

We can arrange shipment according to your requirement. We are not responsible for your importing procedure and customs clearance. We suggest you to contact your local customs broker and shipping company.

Real Pictures



Structure Design

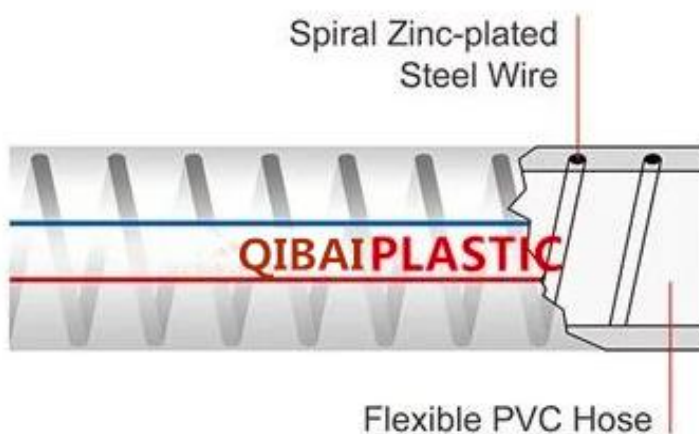

Specifications:

Name: food grade pvc hose/pvc reinforced steel wire hose/pvc food hose

Size: it can be customized or as the data details.

Color: transparent or customized other colors.

Applications:

Our pvc hoses are used for conveying water,oil,food under normal working condition in the factories,farm,ship,building and family.

Characteristics:

The hoses are flexible,durable,non-toxic,without odor and resistant to high pressure and erosion. By adding colorful symbol lines on the surface of the hoses,its looks more beautiful.

Working temperature: -5C-65C

Payment term: 30% TT deposit; 70% TT payment before shipment/ sending copy of BL/ LC at sight. This can be negotiation.

Production date: 10-15days after receiving your deposit.

Sample: we can provide free samples to you, buyer will pay the delivery cost by EMS,DHL,FEDEX,UPS and line.

DATA 1 (PVC steel wire hose)

SIZE	I.D.	O.D.	weight/m	W.P.	B.P.Mpa		m/roll	weight/roll
inch	mm	mm	kg	Mpa	At23℃	At60℃	meter	KG
1/4"	6	11	0.12	-0.1-1.1	3.3	1.6	100	11.5
5/16"	8	14	0.15	-0.1-1.1	3.3	1.6	100	15
3/8"	9	15	0.18	-0.1-1.1	3.3	1.6	100	18
	10	16	0.20	-0.1-1.1	3.3	1.5	100	20
1/2"	12	18	0.22	-0.1-1.0	3.0	1.5	100	22
5/8"	15	22	0.31	-0.1-1.0	3.0	1.3	100	31
3/4"	19	26	0.36	-0.1-1.0	3.0	1.2	50	18
1"	25	33	0.54	-0.1-1.0	2.5	1	50	27
1-1/4"	32	41	0.78	-0.1-0.7	2.0	0.9	40	31
1-1/2"	38	48	1.05	-0.1-0.6	1.8	0.8	40	42
1-3/4"	45	56	1.30	-0.1-0.5	1.7	0.8	40	52
1-7/8"	48	59	1.40	-0.1-0.5	1.6	0.7	40	56
2"	50	62	1.60	-0.1-0.5	1.6	0.7	40	64
2-5/16"	58	70	2.00	-0.1-0.5	1.5	0.7	40	80
2-1/2"	63	80	2.80	-0.1-0.5	1.4	0.5	30	84
3"	75	91	3.50	-0.1-0.4	1.3	0.5	30	105
3-1/2"	90	108	4.50	-0.1-0.5	1.2	0.5	20	90
4"	100	118	4.80	-0.1-0.5	1.0	0.5	20	96
4-3/8"	110	123	4.00	-0.1-0.5	1.0	0.5	20	80
4-5/8"	117	133	5.50	-0.1-0.5	1.0	0.5	20	110
5"	127	143	6.00	-0.1-0.5	1.0	0.5	20	120
5-1/2"	140	156	6.50	-0.1-0.5	1.0	0.5	10	65
6"	152	170	9.00	-0.1-0.5	1.0	0.5	10	90
6-5/16"	160	176	8.50	-0.1-0.5	1.0	0.5	10	85
7"	180	196	8.50	-0.1-0.5	1.0	0.5	10	85
8"	200	224	12.00	-0.1-0.5	1.0	0.5	10	120

noted: the size and lenght can be customized.



DATE 2 (PVC steel wire hose)


SIZE	I.D.	O.D.	weight/m	W.P.	B.P.Mpa		m/roll	weight/roll
inch	mm	mm	kg	Mpa	At23℃	At60℃	meter	KG
3/8"	9	14	0.15	-0.1-1.0	3.0	1.3	100	15
	10	15	0.16				100	16
1/2"	12	17	0.17	-0.1-0.9	3.0	1.3	100	17
		18	0.20				100	20
5/8"	15	21	0.26	-0.1-0.8	2.0	1.0	100	26
	16	20	0.18				100	18
		23	0.32				100	32
3/4"	19	25	0.30	-0.1-0.8	2.0	1.0	50	15
	20	26	0.32				50	16
		24.5	0.26				50	13
7/8"	22	30	0.50				50	25
		27	0.30				50	15
1"	25	29	0.22	-0.1-0.7	2.0	1.0	50	11
		30	0.36				50	18
		32	0.50				50	25
1-1/4"	32	36	0.40	-0.1-0.5	1.9	0.9	50	20
		38.6	0.60	-0.1-0.6	2.0	1.0	50	30
		41	0.80				50	40
		41.6	0.90				50	45
1-1/2"	38	42.8	0.50	-0.1-0.5	1.6	0.7	50	25
		44	0.60				50	30
		44.6	0.70				50	35
		45.5	0.80	-0.1-0.6	1.8	0.8	50	40
		46.4	0.90				50	45
1-3/4"	45	50	0.60	-0.1-0.5	1.6	0.7	50	30
		52	0.80				50	40
		53	1.00				50	50
1-7/8"	48	54.6	0.80	-0.1-0.5	1.5	0.6	50	40
		56.4	1.20				50	60
		58	1.40				50	70
2"	50	55.6	0.80	-0.1-0.5	1.0	0.5	50	40
		57.2	1.00		1.4	0.5	50	50
		58.2	1.20		1.4	0.5	50	60
		60	1.40		1.5	0.6	50	70
2-1/2"	64	72.3	1.50	-0.1-0.4	1.0	0.5	40	60
		75	2.00				40	80
		76	2.35				40	94
		77	2.50				40	100
3"	75	84	1.80	-0.1-0.4	1.0	0.5	40	72
		85	2.00				40	80
		87	2.50				40	100
		89	3.00				40	120
4"	102	112	3.00	-0.1-0.3	1.0	0.3	30	90
		114	3.50				30	105
		115	4.00				30	120
		118	4.80				30	144

noted: the size and lenght can be customized.



CHANGLE QIBAI TRADING CO.,LTD 潍坊宝通塑料制品有限公司

www.pvchose.net sales@pvchose.net pvchose@qq.com

Real Pictures

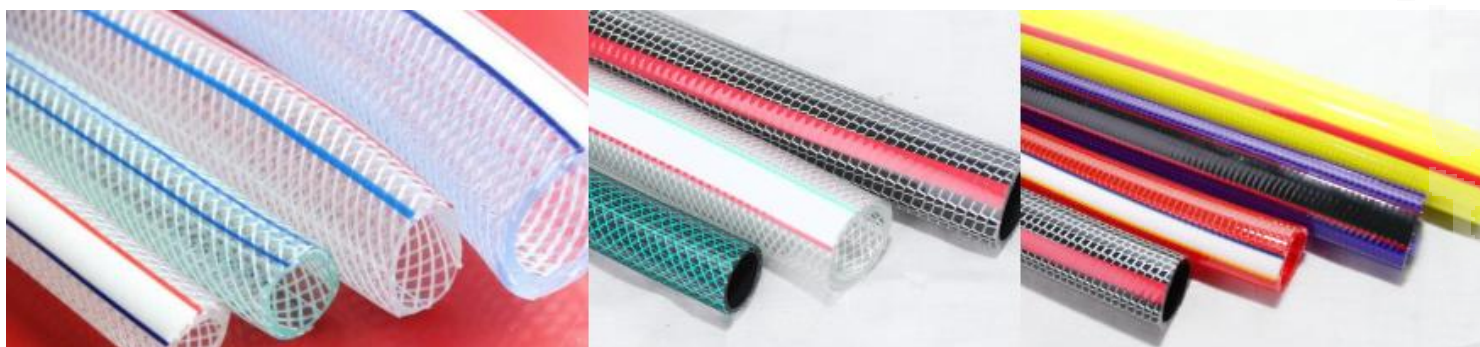

Structure Design

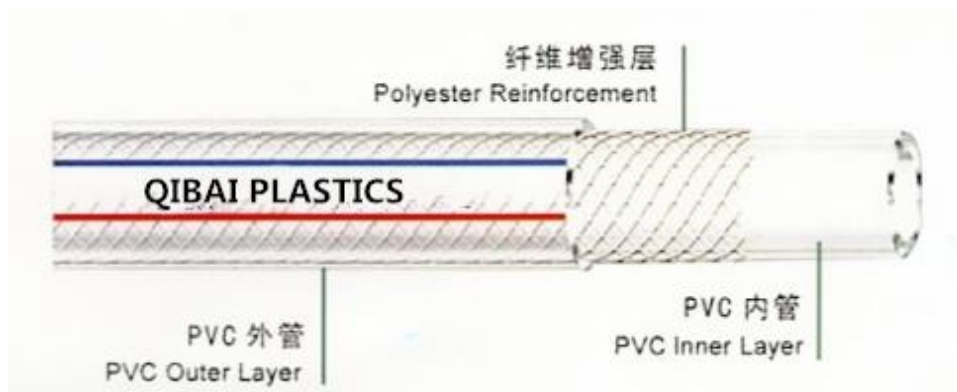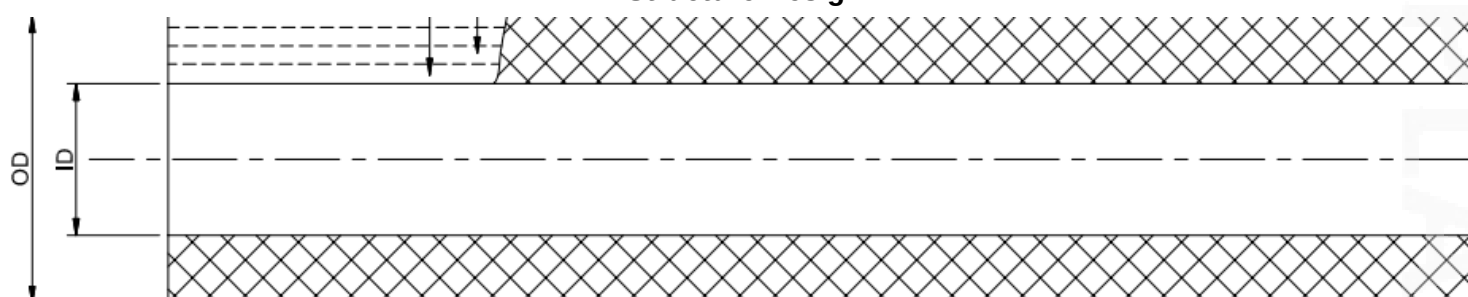

Specifications

Name: food grade pvc hose/pvc reinforced braided hose/pvc braided hose/pvc fiber hose/pvc food hose

Size: it can be customized or as the data details.

Color: transparent or other customized colors.

Applications:

Our pvc hoses are used for conveying water,oil,food under normal working condition in the factories,farm,ship,building and family.

Characteristics:

The hoses are flexible,durable,non-toxic,without odor and resistant to high pressure and erosion. By adding colorful symbol lines on the surface of the hoses,its looks more beautiful.

Working temperature: -5C-65C

Payment term: 30% TT deposit; 70% TT payment before shipment/ sending copy of BL/ LC at sight. This can be negotiation.

Production date: 10-15days after receiving your deposit.

Sample: we can provide free samples to you, buyer will pay the delivery cost by EMS,DHL,FEDEX,UPS and line.


CHANGLE QIBAI TRADING CO.,LTD 潍坊宝通塑料制品有限公司

www.pvchose.net sales@pvchose.net pvchose@qq.com

SIZE	I.D.	O.D.	weight/m	W.P.Mpa	B.P.Mpa	m/roll	weight/roll
inch	mm	mm	kg	At23°C		meter	KG
13/64"	5	9	0.059	0.8	2.5	100	5.88
1/4"	6	10	0.067	1.0	3.0	100	6.67
		11	0.091			100	9.09
		12	0.114			100	11.36
5/16"	8	12	0.085	1.0	3.0	100	8.47
		13	0.111			100	11.11
		14	0.139			100	13.89
3/8"	9	13	0.093	0.9	2.7	100	9.26
		14	0.120			100	12.05
13/32"	10	14	0.100	0.8	2.4	100	10.00
		15	0.133			100	13.33
		16	0.167			100	16.67
1/2"	12	16	0.118	0.7	2.1	100	11.76
		17	0.154			100	15.38
		18	0.190	0.9	2.7	100	19.05
	13	17	0.125	0.6	1.8	100	12.50
		18	0.161			100	16.13
		19	0.200			100	20.00
35/64"	14	19	0.174	0.7	2.1	100	17.39
		20	0.215			100	21.51
5/8"	15	20	0.185	0.7	2.1	100	18.52
	16	20	0.153	0.5	1.5	100	15.27
		21	0.200	0.7	2.1	100	20.00
		22	0.241	0.8	2.4	100	24.10
45/64"	18	24	0.267	0.6	1.8	50	13.33
3/4"	19	24	0.227	0.6	1.8	50	11.36
		25	0.286	0.7	2.1	50	14.29
		26	0.333	0.8	2.4	50	16.67
25/32"	20	25	0.238	0.6	1.8	50	11.90
		26	0.294			50	14.71
		27	0.357	0.7	2.1	50	17.86
		28	0.400			50	20.00
7/8"	22	27	0.267	0.5	1.5	50	13.33
		28	0.317	0.6	1.8	50	15.87
1"	25	30	0.290	0.4	1.2	50	14.49
		31	0.357	0.5	1.5	50	17.86
		32	0.426			50	21.28
		33	0.500	0.6	1.8	50	25.00
1-1/4"	32	39	0.526	0.4	1.2	30	15.79
		40	0.612	0.5	1.5	30	18.37
		42	0.811			30	24.32
1-1/2"	38	46	0.714	0.5	1.5	30	21.43
		48	0.968			30	29.03
1-3/4"	45	55	1.064	0.4	1.2	30	31.91
2"	50	59	1.042	0.4	1.2	30	31.25
		60	1.163			30	34.88
		62	2.000			30	60.00
2-1/2"	64	78	2.174	0.4	1.2	30	65.22

noted: the size and lenght can be customized.

Real Pictures

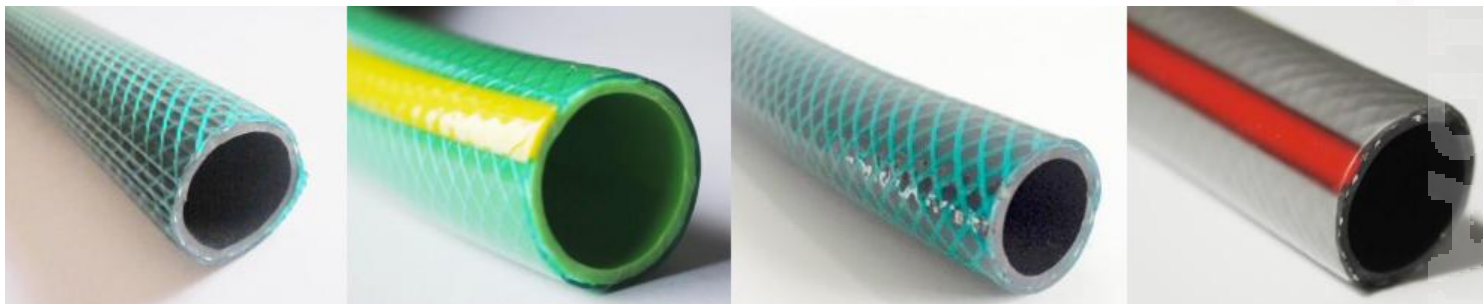

Structure Design



Specifications

Name: pvc oil hose/pvc gas hose/pvc garden water hose/pvc reinforced braided hose

Size: please see the data details.

Color: white/red/yellow/transparent and customized.

Applications:

Our pvc hoses are used for conveying water,oil,gas under normal working condition in the factories,farm,ship,building and family.

Characteristics:

The hoses are flexible,durable,non-toxic,without odor and resistant to high pressure and erosion. By adding colorful symbol lines on the surface of the hoses,its looks more beautiful.

Working temperature: -5C-65C

Payment term: 30% TT deposit; 70% TT payment before shipment/ sending copy of BL/ LC at sight. This can be negotiation.

Production date: 10-15days after receiving your deposit.

Sample: we can provide free samples to you, buyer will pay the delivery cost by EMS,DHL,FEDEX,UPS and lines.

DATA (PVC garden water hose)


SIZE	I.D.	O.D.	weight/m	W.P.Mpa	B.P.Mpa	m/roll	weight/roll
inch	mm	mm	kg	At23°C		meter	KG
13/64"	5	9	0.059	0.8	2.5	100	5.88
1/4"	6	10	0.067	1.0	3.0	100	6.67
		11	0.091			100	9.09
		12	0.114			100	11.36
5/16"	8	12	0.085	1.0	3.0	100	8.47
		13	0.111			100	11.11
		14	0.139			100	13.89
3/8"	9	13	0.093	0.9	2.7	100	9.26
		14	0.120			100	12.05
13/32"	10	14	0.100	0.8	2.4	100	10.00
		15	0.133			100	13.33
		16	0.167			100	16.67
1/2"	12	16	0.118	0.7	2.1	100	11.76
		17	0.154			100	15.38
		18	0.190	0.9	2.7	100	19.05
	13	17	0.125	0.6	1.8	100	12.50
		18	0.161			100	16.13
		19	0.200			100	20.00
35/64"	14	19	0.174	0.7	2.1	100	17.39
		20	0.215			100	21.51
5/8"	15	20	0.185	0.7	2.1	100	18.52
		20	0.153	0.5	1.5	100	15.27
	16	21	0.200	0.7	2.1	100	20.00
		22	0.241	0.8	2.4	100	24.10
45/64"	18	24	0.267	0.6	1.8	50	13.33
3/4"	19	24	0.227	0.6	1.8	50	11.36
		25	0.286	0.7	2.1	50	14.29
		26	0.333	0.8	2.4	50	16.67
25/32"	20	25	0.238	0.6	1.8	50	11.90
		26	0.294			50	14.71
		27	0.357	0.7	2.1	50	17.86
		28	0.400			50	20.00
7/8"	22	27	0.267	0.5	1.5	50	13.33
		28	0.317	0.6	1.8	50	15.87
1"	25	30	0.290	0.4	1.2	50	14.49
		31	0.357	0.5	1.5	50	17.86
		32	0.426			50	21.28
		33	0.500	0.6	1.8	50	25.00
1-1/4"	32	39	0.526	0.4	1.2	30	15.79
		40	0.612	0.5	1.5	30	18.37
		42	0.811			30	24.32
1-1/2"	38	46	0.714	0.5	1.5	30	21.43
		48	0.968			30	29.03
1-3/4"	45	55	1.064	0.4	1.2	30	31.91
2"	50	59	1.042	0.4	1.2	30	31.25
		60	1.163			30	34.88
		62	2.000			30	60.00
2-1/2"	64	78	2.174	0.4	1.2	30	65.22

noted: the size and lenght can be customized.

Real Pictures



Structure Desgin

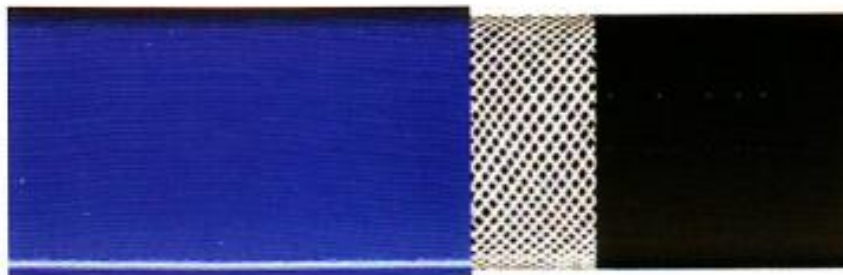

Specifications

Name: pvc layflat water hose/pvc garden water hose

Size: the size can be customized.

Color: white/red/yellow/transparent and others.

Applications:

Our pvc hoses are used for conveying water,oil,gas under normal working condition in the factories,farm,ship,building and family.

Characteristics:

The hoses are flexible,durable,non-toxic,without odor and resistant to high pressure and erosion.

By adding colorful symbol lines on the surface of the hoses,its looks more beautiful.

Working temperature: -5C-65C


Payment term: 30% TT deposit; 70% TT payment before shipment/ sending copy of BL/ LC at sight. This can be negotiation.

Production date: 10-15days after receiving your deposit.

Sample: we can provide free samples to you, buyer will pay the delivery cost by EMS,DHL,FEDEX,UPS and lines.

SIZE	I.D.	Tol	Thickness	weight/m	W.P.Bar	B.P.Bar	m/roll	weight/roll
inch	mm	mm	mm	kg	At23°C		meter	KG
1"	25	-0/+1	1.2-1.3	0.15	4	12	100	15
			1.3-1.4	0.18	6	18	100	18
1-1/4"	32	-0/+1	1.0-1.1	0.17	4	12	100	17
			1.2-1.3	0.18	6	18	100	18
1-1/2"	38	-0/+1	1.1-1.2	0.2	4	12	100	20
			1.2-1.3	0.22	6	18	100	22
	40	-0/+1	1.0-1.2	0.21	4	12	100	21
			1.2-1.3	0.23	6	18	100	23
1-3/4"	45	-0/+1	1.0-1.1	0.22	4	12	100	22
			1.1-1.2	0.24	6	18	100	24
2"	51	-0/+1	1.0-1.1	0.22	2-4	6-12	100	22
			1.2-1.3	0.26	5-6	15-18	100	26
			1.4-1.5	0.4	7-8	21-25	50	20
2.5"	65	-0/+1	1.1-1.2	0.32	2-4	6-12	50	16
			1.3-1.4	0.4	5-6	15-18	50	20
			1.4-1.5	0.65	7-8	21-25	50	32.5
3"	76	-0/+1	1.1-1.2	0.35	2-4	6-12	50	17.5
			1.4-1.5	0.5	5-6	15-18	50	25
			1.5-1.6	0.8	7-8	21-25	50	40
4"	102	-0/+1	1.3-1.5	0.55	2-4	6-12	50	27.5
			1.6-1.7	0.7	5-6	15-18	50	35
			1.8-1.9	1	7-8	21-25	50	50
5"	127	-0/+1	1.3-1.4	0.75	2-4	6-12	50	37.5
			1.7-1.8	1.1	5-6	15-18	50	55
			1.9-2.0	1.5	7-8	21-25	50	75
6"	152	-0/+1	1.4-1.5	0.85	2-4	6-12	30	25.5
			1.6-1.8	1.2	5-6	15-18	30	36
			1.9-2.0	2	7-8	21-25	30	60
8"	200	-0/+1	1.6-1.7	1.7	2-4	6-12	30	51
			1.8-2.0	2	5-6	15-18	20	40


noted: the size and lenght can be customized.

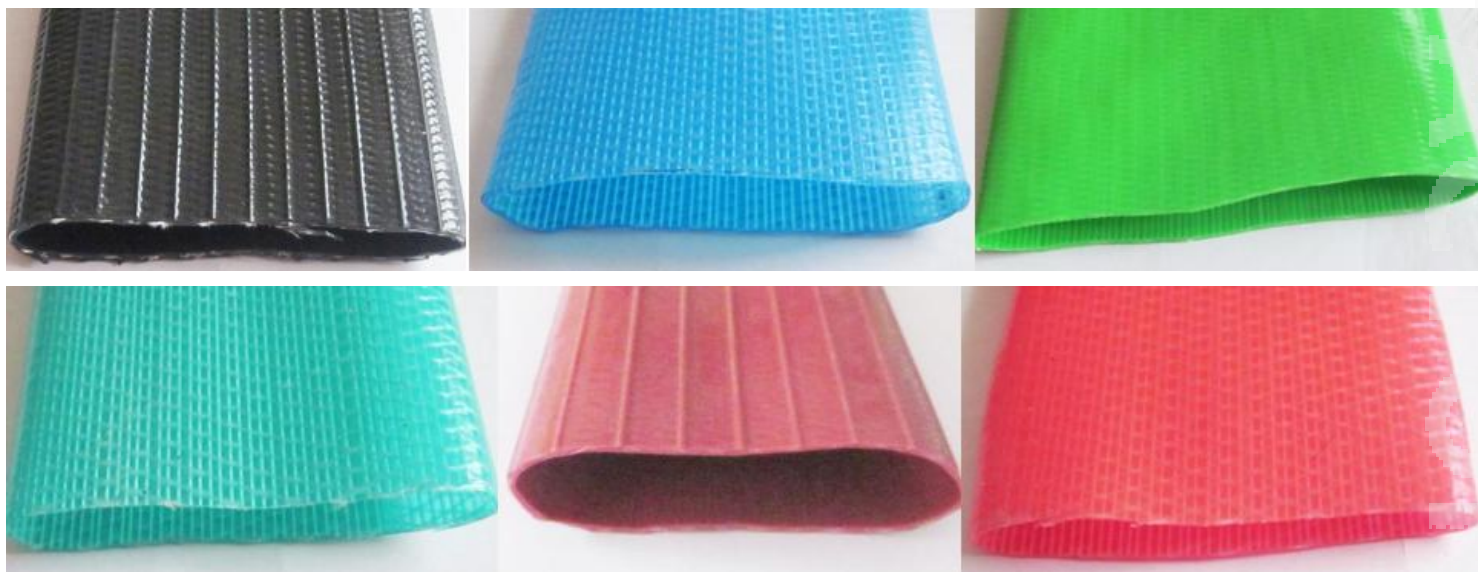

Real Pictures



Structure Design

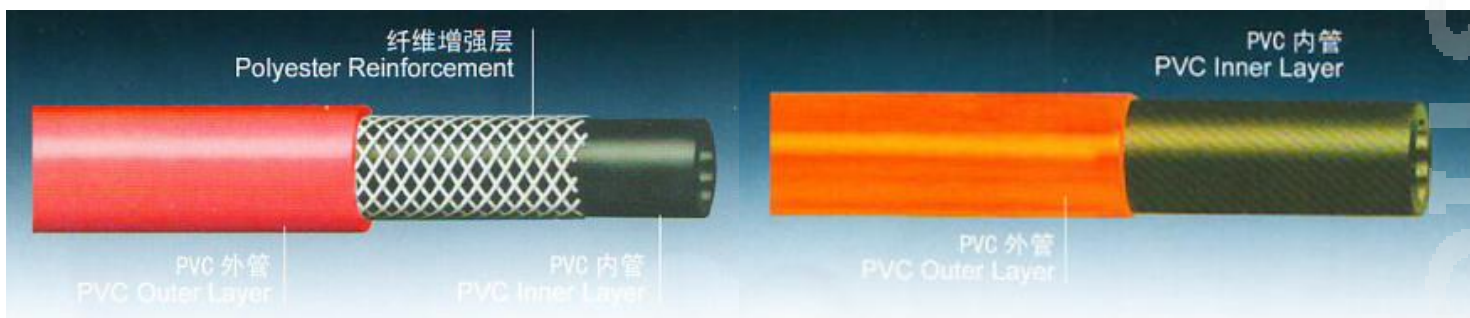

Specifications

Name: pvc oil hose/pvc gas hose/pvc garden water hose/pvc reinforced braided hose

Size: please ask for us.

Color: white/red/yellow/transparent and others.

Applications:

Our pvc hoses are used for conveying water,oil,gas under normal working condition in the factories,farm,ship,building and family.

Characteristics:

The hoses are flexible,durable,non-toxic,without odor and resistant to high pressure and erosion.

By adding colorful symbol lines on the surface of the hoses,its looks more beautiful.

Working temperature: -5C-65C

Payment term: 30% TT deposit; 70% TT payment before shipment/ sending copy of BL/ LC at sight. This can be negotiation.


Production date: 10-15days after receiving your deposit.

Sample: we can provide free samples to you, buyer will pay the delivery cost by EMS,DHL,FEDEX,UPS and lines.

SIZE	I.D.	O.D.	weight/m	W.P.Mpa	B.P.Mpa	m/roll	weight/roll
inch	mm	mm	kg	At23°C		meter	KG
13/64"	5	9	0.059	0.8	2.5	100	5.88
1/4"	6	10	0.067	1.0	3.0	100	6.67
		11	0.091			100	9.09
		12	0.114			100	11.36
5/16"	8	12	0.085	1.0	3.0	100	8.47
		13	0.111			100	11.11
		14	0.139			100	13.89
3/8"	9	13	0.093	0.9	2.7	100	9.26
		14	0.120			100	12.05
13/32"	10	14	0.100	0.8	2.4	100	10.00
		15	0.133			100	13.33
		16	0.167			100	16.67
1/2"	12	16	0.118	0.7	2.1	100	11.76
		17	0.154			100	15.38
		18	0.190	0.9	2.7	100	19.05
	13	17	0.125	0.6	1.8	100	12.50
		18	0.161			100	16.13
		19	0.200			100	20.00
35/64"	14	19	0.174	0.7	2.1	100	17.39
		20	0.215			100	21.51
5/8"	15	20	0.185	0.7	2.1	100	18.52
		20	0.153	0.5	1.5	100	15.27
	16	21	0.200	0.7	2.1	100	20.00
		22	0.241	0.8	2.4	100	24.10
45/64"	18	24	0.267	0.6	1.8	50	13.33
3/4"	19	24	0.227	0.6	1.8	50	11.36
		25	0.286	0.7	2.1	50	14.29
		26	0.333	0.8	2.4	50	16.67
25/32"	20	25	0.238	0.6	1.8	50	11.90
		26	0.294			50	14.71
		27	0.357	0.7	2.1	50	17.86
		28	0.400			50	20.00
7/8"	22	27	0.267	0.5	1.5	50	13.33
		28	0.317	0.6	1.8	50	15.87
1"	25	30	0.290	0.4	1.2	50	14.49
		31	0.357	0.5	1.5	50	17.86
		32	0.426			50	21.28
		33	0.500	0.6	1.8	50	25.00

noted: the size and lenght can be customized.

Real Pictures

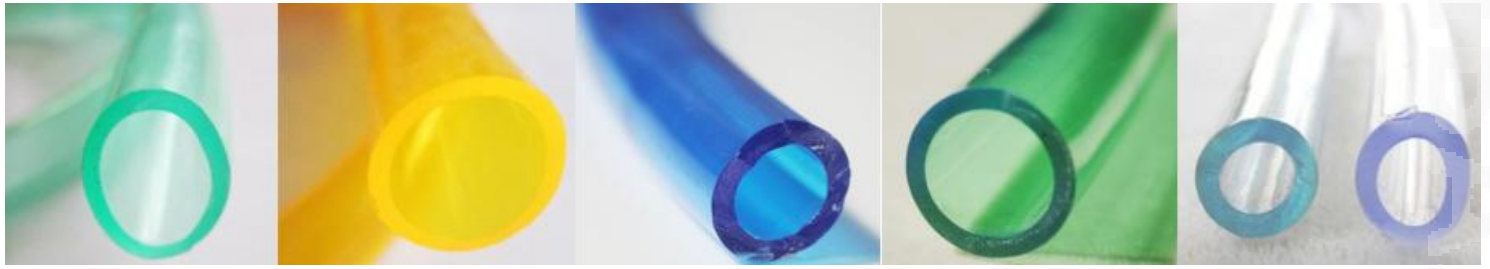

Packing



Structure design



Specifications

Name: pvc clear water hose/pvc transparent liquid hose

Size: please ask for us.

Color: white/red/yellow/transparent and others.

Applications:

Our pvc transparent hoses are used for conveying water,oil,gas under normal working condition in the factories,farm,ship,building and family.

Characteristics:

The hoses are flexible,durable,non-toxic,without odor and resistant to high pressure and erosion. By adding colorful symbol lines on the surface of the hoses,its looks more beautiful.

Working temperature: -5C-65C

Payment term: 30% TT deposit; 70% TT payment before shipment/ sending copy of BL/ LC at sight. This can be negotiation.

Production date: 10-15days after receiving your deposit.


Sample: we can provide free samples to you, buyer will pay the delivery cost by EMS,DHL,FEDEX,UPS and lines.

DATA (PVC transparent hose)

SIZE	I.D.	O.D.	weight/m	W.P.Mpa	B.P.Mpa	m/roll	weight/roll
inch	mm	mm	kg	At23℃		meter	KG
1/4"	6	8	0.029	0.5	1.5	100	2.90
5/16"	8	10	0.038			100	3.80
3/8"	10	12	0.046			100	4.60
1/2"	12	15	0.084	0.3	1.0	50	4.20
5/8"	15	18	0.104			50	5.20
3/4"	19	22	0.128			50	6.40
1"	25	30	0.284	0.3	0.9	50	14.20
1-1/4"	32	38	0.430			40	17.20
1-1/2"	38	44	0.513			40	20.52
2"	50	58	0.900			40	36.00

noted: the size and lenght can be customized.

Real Pictures

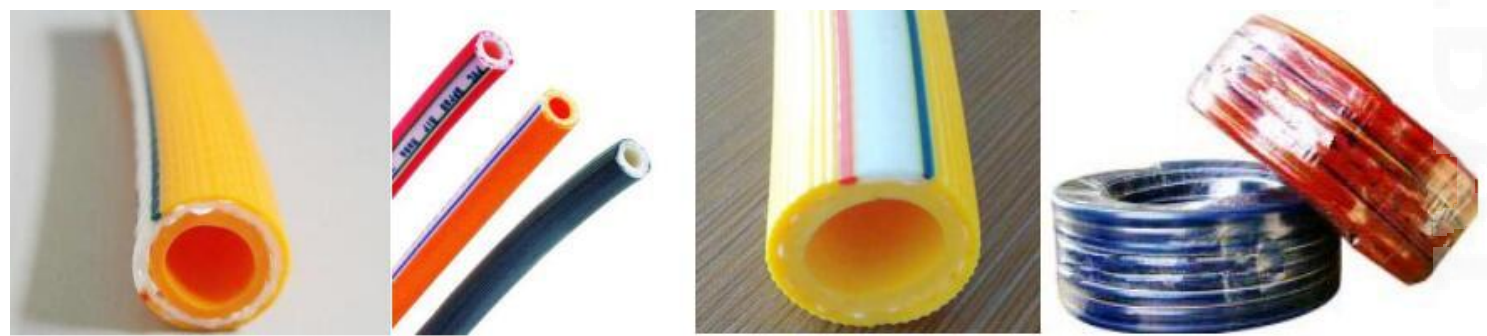

Structure Desgin



Specifications

Name: pvc high pressure hose/pvc spray power hose/pvc high pressure hydraulic hose

Size: the size can be customized.

Color: white/red/yellow/transparent and others.

Applications:

Our pvc hoses are used for conveying water,oil,gas under normal working condition in the factories,farm,ship,building and family.

Characteristics:

The hoses are flexible,durable,non-toxic,without odor and resistant to high pressure and erosion. By adding colorful symbol lines on the surface of the hoses,its looks more beautiful.

Working temperature: -5C-65C

Payment term: 30% TT deposit; 70% TT payment before shipment/ sending copy of BL/ LC at sight. This can be negotiation.

Production date: 10-15days after receiving your deposit.

Sample: we can provide free samples to you, buyer will pay the delivery cost by EMS,DHL,FEDEX,UPS and lines.

DATA (PVC high pressure hose/spray hose/air hose)

SIZE	I.D.	O.D.	weight/m	W.P.Bar	B.P.Bar	m/roll	weight/roll
inch	mm	mm	kg	At23℃		meter	KG
5/16"	8	14	0.110	28	85	100	11.00
3/8"	10	16	0.140	26	80	100	14.00
1/2"	13	18	0.140	21	65	100	14.00
		19	0.170	23	70	100	17.00
5/8"	16	21	0.180	23	70	100	18.00
		22	0.210	20	60	100	21.00
3/4"	19	24	0.220	20	60	100	22.00
		25	0.250	18	55	100	25.00
1"	25	31	0.330	16	50	50	16.50
		31.5	0.350	17	52	50	17.50
		32	0.380	18	55	50	19.00
1-1/4"	32	38.5	0.460	13	40	50	23.00
		39	0.490	14	42	50	24.50
1-1/2"	38	46	0.670	10	30	50	33.50
		47	0.750	11	33	50	37.50

noted: the size and lenght can be customized.

Real Pictures



Structure Dedesign



Specifications

Name: pvc twin welding hose

Size: the size can be customized.

Color: white/red/yellow/transparent and others.

Applications:

Our pvc hoses are used for conveying water,oil,gas under normal working condition in the factories,farm,ship,building and family.

Characteristics:

The hoses are flexible,durable,non-toxic,without odor and resistant to high pressure and erosion. By adding colorful symbol lines on the surface of the hoses,its looks more beautiful.

Working temperature: -5C-65C

Payment term: 30% TT deposit; 70% TT payment before shipment/ sending copy of BL/ LC at sight. This can be negotiation.

Production date: 10-15days after receiving your deposit.

Sample: we can provide free samples to you, buyer will pay the delivery cost by EMS,DHL,FEDEX,UPS and lines.

SIZE	I.D.	Thickness	weight/m	W.P.Bar	B.P.Bar	Material	m/roll	weight/roll
inch	mm	mm	kg	At23℃			meter	KG
5/16"	8	3	0.220	20	60	pvc	100	22.00
			0.220	20	60	pvc+rubber	100	22.00
			0.220	26	80	polyurethanes	100	22.00
3/8"	10		0.280	20	60	pvc	100	28.00
			0.280	20	60	pvc+rubber	100	28.00
			0.280	26	80	polyurethanes	100	28.00

noted: the size and lenght can be customized.


Packing



Real Pictures



Structure Design

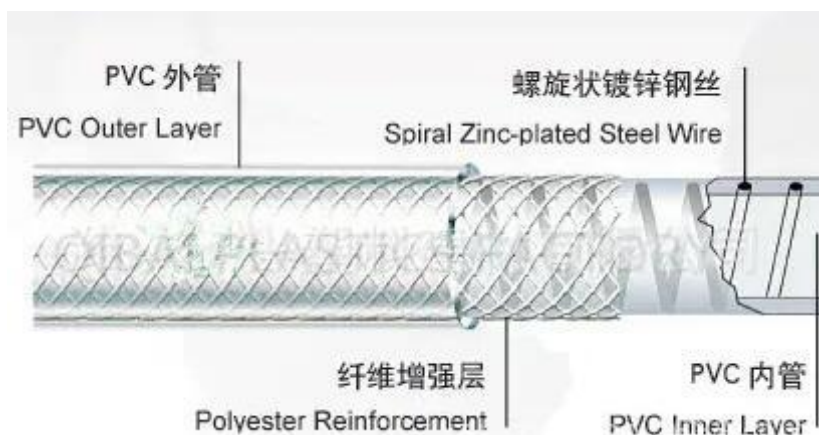

Specifications

Name: food grade pvc hose/pvc reinforced steel wire with braided hose/pvc food hose

Size: it can be customized.

Color: transparent.

Applications:

Our pvc hoses are used for conveying water,oil,food under normal working condition in the factories,farm,ship,building and family.

Characteristics:

The hoses are flexible,durable,non-toxic,without odor and resistant to high pressure and erosion. By adding colorful symbol lines on the surface of the hoses,its looks more beautiful.

Working temperature: -5C-65C

Payment term: 30% TT deposit; 70% TT payment before shipment/ sending copy of BL/ LC at sight. This can be negotiation.


Production date: 10-15days after receiving your deposit.

Sample: we can provide free samples to you, buyer will pay the delivery cost by EMS,DHL,FEDEX,UPS and line.

DATA 1 (PVC steel wire hose)

SIZE	I.D.	O.D.	weight/m	W.P.	B.P.Mpa		m/roll	weight/roll
inch	mm	mm	kg	Mpa	At23℃	At60℃	meter	KG
3/4"	19	26	0.40	1.0-2.0	6.0	2.4	50	20
1"	25	33	0.54	1.0-2.0	5.0	2	50	27
	25	32	0.50	1.0-2.0	4.0	1.8	50	25
1-1/4"	32	41	0.78	1.0-1.4	4.0	1.8	40	31
	32	40	0.70	1.0-1.4	3.6	1.6	40	28
1-1/2"	38	48	1.05	1.0-1.2	3.6	1.6	40	42
	38	47	0.90	1.0	3.4	1.6	40	36
1-3/4"	45	56	1.30	1.0	3.4	1.6	40	52
1-7/8"	48	59	1.40	1.0	3.2	1.4	40	56
2"	50	62	1.60	1.0	3.2	1.4	40	64
	50	59	1.30	1.0	3.0	1.4	40	52
2-1/2"	63	80	2.80	1.0	2.8	1	30	84
	64	76	2.17	0.8	2.6	1	30	65
3"	75	91	3.50	0.8	2.6	1	20	70
		90	3.00	0.8	2.4	1	20	60
		88	2.50	0.8	2.4	1	20	50
3-1/2"	90	108	4.50	0.8	2.4	1	20	90
4"	102	116	4.00	0.8	2.4	1	20	90
	100	118	4.80	1.0	3.0	1	20	96


noted: the size and lenght can be customized.

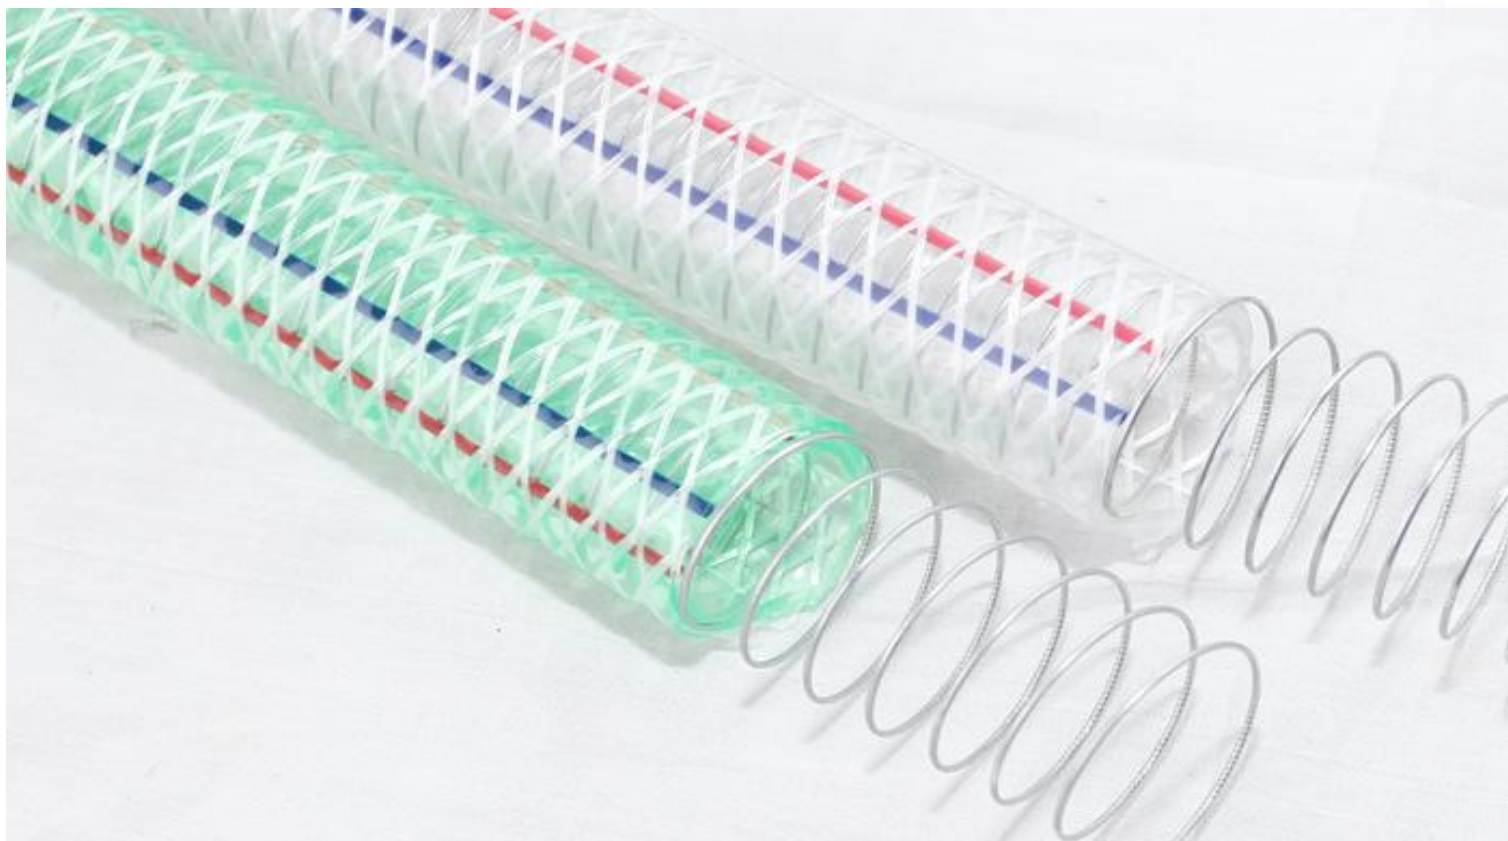

Real Pictures



Structure Design

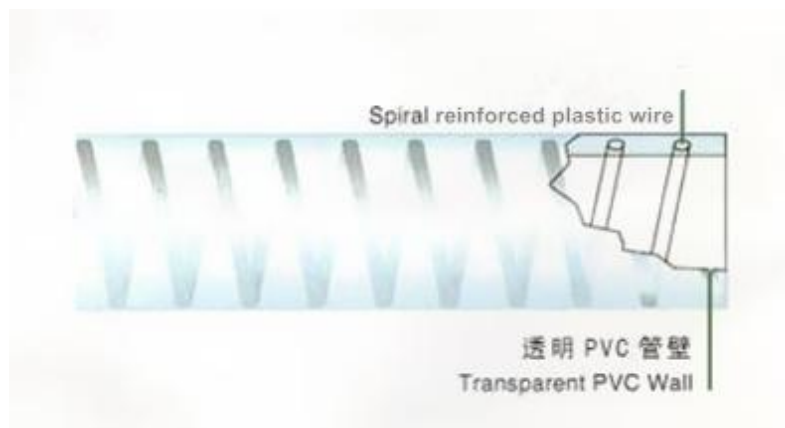

Name: pvc helix suction hose/pvc vacuum hose

Size: the size can be customized.

Color: white/red/yellow/transparent and others.

Applications:

Our pvc hoses are used for conveying water,oil,gas under normal working condition in the factories,farm,ship,building and family.

Characteristics:

The hoses are flexible,durable,non-toxic,without odor and resistant to high pressure and erosion. By adding colorful symbol lines on the surface of the hoses,its looks more beautiful.

Working temperature: -5C-65C

Payment term: 30% TT deposit; 70% TT payment before shipment/ sending copy of BL/ LC at sight. This can be negotiation.

Production date: 10-15days after receiving your deposit.

Sample: we can provide free samples to you, buyer will pay the delivery cost by EMS,DHL,FEDEX,UPS and lines.

DATA (PVC HELIX SUCTION HOSE,PVC VACUUM HOSE)

SIZE	I.D.	O.D.	weight/m	W.P.Bar	B.P.Bar	m/roll	weight/roll
inch	mm	mm	kg	At23°C		meter	KG
5/8"	16	18	0.078	0.8	2.4	50	3.9
		20	0.156			50	7.8
		22	0.234			50	11.7
25/32"	20	22	0.1	0.7	2.1	50	5
		24	0.2			50	10
		26	0.3			50	15
		28	0.4			50	20
1"	25	27	0.12	0.7	2.1	50	6
		29	0.24			50	12
		31	0.36			50	18
		33	0.48			50	24
1-1/16"	28	32	0.26	0.6	1.8	30	7.8
		34	0.39			30	11.7
		36	0.52			30	15.6
1-1/4"	32	36	0.292	0.6	1.8	30	8.76
		38	0.438			30	13.14
		40	0.584			30	17.52
1-1/2"	38	42	0.356	0.6	1.8	30	10.68
		44	0.534			30	16.02
		46	0.712			30	21.36
		48	0.89			30	26.7
2"	50	54	0.46	0.6	1.8	30	13.8
		56	0.69			30	20.7
		58	0.92			30	27.6
		60	1.15			30	34.5
		52	1.38			30	41.4
2-1/2"	64	70	0.87	0.6	1.8	30	26.1
		72	1.16			30	34.8
		74	1.45			30	43.5
		78	1.74			30	52.2
3"	75	81	1.02	0.5	1.5	30	30.6
		83	1.36			30	40.8
		85	1.7			30	51
		87	2.04			30	61.2
3-1/2"	89	95	1.146	0.5	1.5	30	34.38
		97	1.53			30	45.9
		99	1.93			30	57.9
		101	2.3			30	69
		103	2.7			30	81
4"	102	108	1.35	0.5	1.5	30	40.5
		110	1.8			30	54
		112	2.25			30	67.5
		114	2.7			30	81
		116	3.15			30	94.5
		118	3.6			30	108
5"	125	133	2.2	0.4	1.2	20	44
		135	2.75			20	55
		137	3.3			20	66
		139	3.85			20	77
		141	4.4			20	88

6"	150	158	2.64	0.4	1.2	20	52.8
		160	3.3			20	66
		162	3.96			20	79.2
		164	4.62			20	92.4
		166	5.28			20	105.6
		168	5.94			20	118.8
8"	200	208	3.56	0.3	0.9	10	35.6
		210	4.45			10	44.5
		212	5.34			10	53.4
		214	6.23			10	62.3
		216	7.12			10	71.2
		218	8.01			10	80.1

noted: the size and lenght can be customized.

Real pictures

